



NO.1125020116

检 测 报 告

Test Report

样品名称： 圆柱形可充电锂离子电芯 IMR18650-2000mAh 3.7V
2000mAh 7.4Wh

Name of Sample: Cylindrical lithium-ion rechargeable cell
IMR18650-2000mAh 3.7V 2000mAh 7.4Wh

委托单位： 新乡市弘力电源科技有限公司

Consignor: Xinxiang Hongli Supply Source Technology Co., Ltd.

上海化工院检测有限公司

Shanghai Institute of Chemical Industry Testing Co., Ltd.



上海化工院检测有限公司

检测报告

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report

NO. 1125020116

1/10

样品名称 Name of Sample	中文 Chinese	圆柱形可充电锂离子电芯 IMR18650-2000mAh 3.7V 2000mAh 7.4Wh	
	英文 English	Cylindrical lithium-ion rechargeable cell IMR18650-2000mAh 3.7V 2000mAh 7.4Wh	
样品编号 Sample No.	1125020116		
委托单位 Consignor	新乡市弘力电源科技有限公司 Xinxiang Hongli Supply Source Technology Co., Ltd.		
生产单位 Manufacturer	新乡市弘力电源科技有限公司 Xinxiang Hongli Supply Source Technology Co., Ltd.		
检测方法 Test method	联合国《试验和标准手册》 ST/SG/AC.10/11/Rev.8 38.3 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3		
判定标准 Criterion	联合国《试验和标准手册》 ST/SG/AC.10/11/Rev.8 38.3 UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3		
样品外观 Appearance	紫色 圆柱型塑料薄膜外壳 Violet Cylinder plastics film shell		
样品接受日期 Accepted Date	2025-02-10	检测起迄日期 Test Date	2025-02-18 ~ 2025-03-18
检测项目 Test Items	高度模拟;热测试;振动;冲击;外短路;撞击;强制放电 Altitude simulation, Thermal test, Vibration, Shock, External short circuit, Impact, Forced discharge		
检测结论 Conclusion	经检测,该样品符合联合国《试验和标准手册》ST/SG/AC.10/11/Rev.8 38.3标准要求。 The sample has passed the test items of UN Manual of Tests and Criteria ST/SG/AC.10/11/Rev.8 Section 38.3 生效日期(Date): 2025-03-18		
备注 Comment	可充电锂电池芯Rechargeable Lithium Cell.		
委托单位地址 Consignor Address	/		邮政编码 Post Code 518103

批准
Approver:
职务
Title:

许魁

审核
Checker:

丁志中

编制
Compiler:

傅强

新能源安全部部长(Head of New Energy Safety Department)



上海化工院检测有限公司

检测报告

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report

NO. 1125020116

2/10

序号 No.	检测项目名称 Name of Test Items	标准要求或标准条款号 Standard requirement or The Clause Number of Standard	检测结果 Test Result	本项结论 Conclusion	备注 Remark
1	高度模拟 Altitude simulation	联合国《试验和标准手册》ST/SG/AC. 10/11/Rev. 8 38.3 试验T.1 UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3 Test T. 1	见附表 1 See Appendix 1	合格 Passed	/
2	热测试 Thermal test	联合国《试验和标准手册》ST/SG/AC. 10/11/Rev. 8 38.3 试验T.2 UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3 Test T. 2	见附表 2 See Appendix 2	合格 Passed	/
3	振动 Vibration	联合国《试验和标准手册》ST/SG/AC. 10/11/Rev. 8 38.3 试验T.3 UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3 Test T. 3	见附表 3 See Appendix 3	合格 Passed	/
4	冲击 Shock	联合国《试验和标准手册》ST/SG/AC. 10/11/Rev. 8 38.3 试验T.4 UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3 Test T. 4	见附表 4 See Appendix 4	合格 Passed	/
5	外短路 External short circuit	联合国《试验和标准手册》ST/SG/AC. 10/11/Rev. 8 38.3 试验T.5 UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3 Test T. 5	见附表 5 See Appendix 5	合格 Passed	/
6	撞击 Impact	联合国《试验和标准手册》ST/SG/AC. 10/11/Rev. 8 38.3 试验T.6 UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3 Test T. 6	见附表 6 See Appendix 6	合格 Passed	/
7	强制放电 Forced discharge	联合国《试验和标准手册》ST/SG/AC. 10/11/Rev. 8 38.3 试验T.8 UN Manual of Tests and Criteria ST/SG/AC. 10/11/Rev. 8 Section 38.3 Test T. 8	见附表 7 See Appendix 7	合格 Passed	/
8	以下空白	This space intentionally left blank			
检测环境条件 Test Environment Condition		环境温度:20℃-25℃;环境湿度:/% Ambient temperature:20℃-25℃;Ambient humidity:/%			
分包检验情况 Subcontracted Test Condition		检测项目 Test Item	/		
		分包实验室 Subcontracted Laboratory	名称 Name	/	邮编 Post Code
			地址 Address	/	电话 Tel

检测报告-附表1

Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report—Appendix 1

NO. 1125020116

3/10

[illegible]

备注: L-泄漏 V-漏气 D-解体 R-破裂 F-起火 O-无泄漏、无漏气、无解体、无破裂、无起火。

Note: L-Leakage V-Venting D-Disassembly R-Rupture F-Fire O-No Leakage,No Venting,
No Disassembly,No Rupture & No Fire.

检测报告-附表2

NO. 1125020116

4/10

备注: L-泄漏 V-漏气 D-解体 R-破裂 F-起火 O-无泄漏、无漏气、无解体、无破裂、无起火。
Note: L-Leakage V-Venting D-Disassembly R-Rupture F-Fire O-No Leakage, No Venting,
No Disassembly, No Rupture & No Fire.

检测报告-附表3

NO. 1125020116

5/10

备注: L-泄漏 V-漏气 D-解体 R-破裂 F-起火 O-无泄漏、无漏气、无解体、无破裂、无起火。
Note: L-Leakage V-Venting D-Disassembly R-Rupture F-Fire O-No Leakage, No Venting,
No Disassembly, No Rupture & No Fire.

No Disassembly, No Rupture & No Fire.

检测报告-附表5

NO. 1125020116

7/10

序号 No.	5	检测项目名称 Name of Test Items	外短路 External short circuit
样品编号 Sample No.	样品状态 Sample Status	样品表面最高温度 Max. External Temperature /℃	其他现象 Other Event
001	1CYC完全充电 1CYC Fully charged	117.0	O
002	1CYC完全充电 1CYC Fully charged	119.7	O
003	1CYC完全充电 1CYC Fully charged	127.6	O
004	1CYC完全充电 1CYC Fully charged	117.9	O
005	1CYC完全充电 1CYC Fully charged	113.7	O
006	25CYC完全充电 25CYC Fully charged	110.4	O
007	25CYC完全充电 25CYC Fully charged	116.3	O
008	25CYC完全充电 25CYC Fully charged	109.3	O
009	25CYC完全充电 25CYC Fully charged	98.9	O
010	25CYC完全充电 25CYC Fully charged	106.4	O
以下空白	This space intentionally left blank		

备注：D-解体 R-破裂 F-起火 O-无解体、无起火、无破裂。
Note: D-Disassembly R-Ruptur F-Fire O-No Disassembly,No Fire & No Rupture.

8/10

序号 No.	6	检测项目名称 Name of Test Items	撞击 Impact
样品编号 Sample No.	样品状态 Sample Status	样品表面最高温度 Max. External Temperature /°C	其他现象 Other Event
011	1CYC 50%容量 1CYC 50% Capacity	129.0	O
012	1CYC 50%容量 1CYC 50% Capacity	122.1	O
013	1CYC 50%容量 1CYC 50% Capacity	124.3	O
014	1CYC 50%容量 1CYC 50% Capacity	123.9	O
015	1CYC 50%容量 1CYC 50% Capacity	114.3	O
016	25CYC 50%容量 25CYC 50% Capacity	118.8	O
017	25CYC 50%容量 25CYC 50% Capacity	107.6	O
018	25CYC 50%容量 25CYC 50% Capacity	121.5	O
019	25CYC 50%容量 25CYC 50% Capacity	118.8	O
020	25CYC 50%容量 25CYC 50% Capacity	119.6	O
以下空白	This space intentionally left blank		



备注：D-解体 F-起火 O-无解体、无起火。
Note: D-Disassembly F-Fire O-No Disassembly & No Fire.

上海化工院检测有限公司
检 测 报 告 - 附表7
Shanghai Institute of Chemical Industry
Testing Co., Ltd. Test Report — Appendix 7

NO. 1125020116

9/10

序号 No.	7	检测项目名称 Name of Test Items	强制放电 Forced discharge
样品编号 Sample No.	样品状态 Sample Status	其他现象 Other Event	
021	1CYC完全放电 1CYC Fully discharged	O	
022	1CYC完全放电 1CYC Fully discharged	O	
023	1CYC完全放电 1CYC Fully discharged	O	
024	1CYC完全放电 1CYC Fully discharged	O	
025	1CYC完全放电 1CYC Fully discharged	O	
026	1CYC完全放电 1CYC Fully discharged	O	
027	1CYC完全放电 1CYC Fully discharged	O	
028	1CYC完全放电 1CYC Fully discharged	O	
029	1CYC完全放电 1CYC Fully discharged	O	
030	1CYC完全放电 1CYC Fully discharged	O	
031	25CYC完全放电 25CYC Fully discharged	O	
032	25CYC完全放电 25CYC Fully discharged	O	
033	25CYC完全放电 25CYC Fully discharged	O	
034	25CYC完全放电 25CYC Fully discharged	O	
035	25CYC完全放电 25CYC Fully discharged	O	
036	25CYC完全放电 25CYC Fully discharged	O	
037	25CYC完全放电 25CYC Fully discharged	O	
038	25CYC完全放电 25CYC Fully discharged	O	
039	25CYC完全放电 25CYC Fully discharged	O	
040	25CYC完全放电 25CYC Fully discharged	O	
备注: D-解体 F-起火 O-无解体、无起火。 Note: D-Disassembly F-Fire O-No Disassembly & No Fire.			

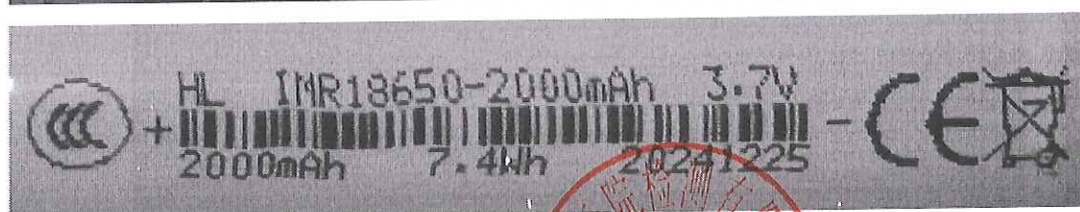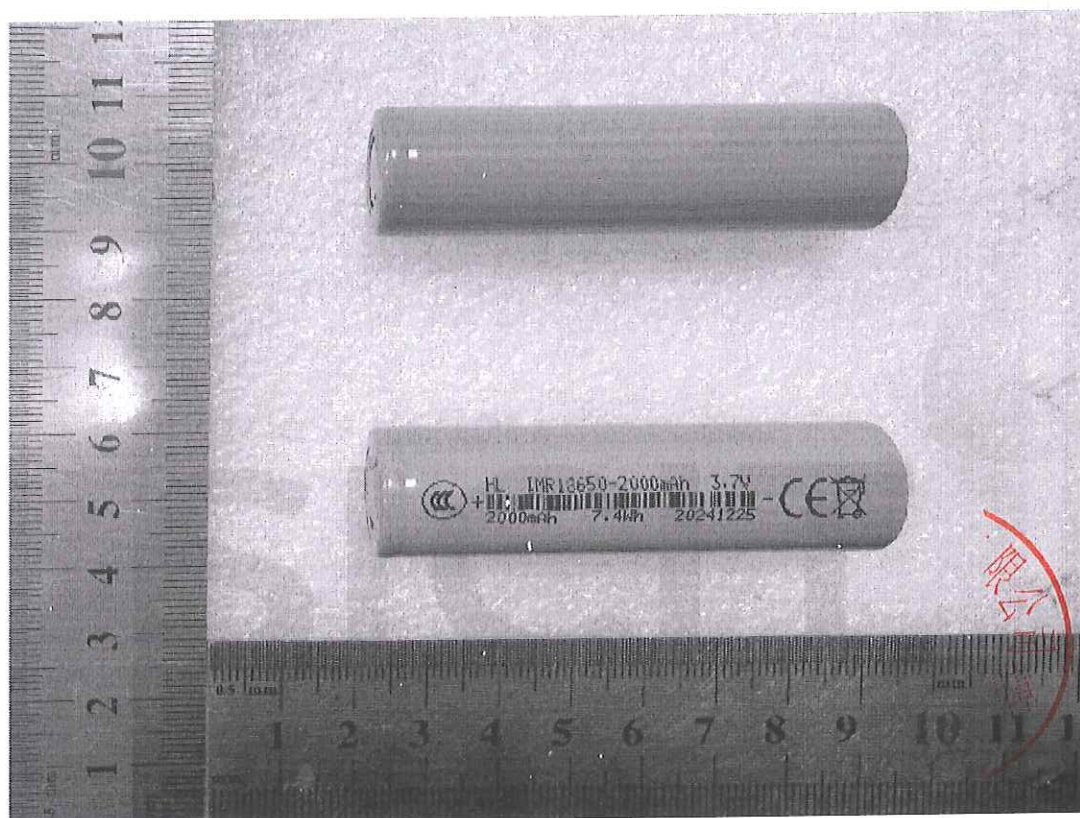

报告结束